

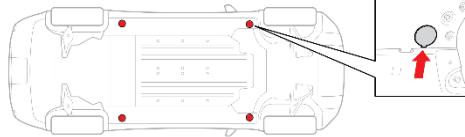
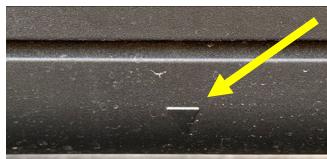
## Raising Rivian Electric Delivery Van (EDV) Vehicles QRG

**Purpose**

To be able to properly and safely lift Rivian EDV vehicles.

**Using the  
Rivian Jack  
Adapter**

Follow these steps when lifting Rivian EDV vehicles:

Step	Action
1	<p>Collect the lift adapters and stage them next to the vehicle.</p> <p><b>Note:</b> Only lift vehicles on a flat surface and only use jacks with saddle pads.</p> 
2	<p>Locate the proper lift points on the undercarriage of the vehicle.</p> <p><b>Note:</b> The lifting points are noted with a ▼ on the side skirt of the van.</p>  
3	<p>Place the adapter in the appropriate lift point.</p> <p><b>Note:</b> Lift points are part of the frame, and have a semi-circle cutout for the adapter contact surface to fit in.</p> 

Continue on next page

**Lifting the Vehicle**

<b>4</b>	Center jack pad under the adapter and begin to raise vehicle.	
<b>5</b>	Repeat Steps 3 and 4 for the remaining lift points.	
<b>Note</b>	For additional fender skirt clips, reach out to <a href="mailto:DTC_Equipmentquality@discounttire.com">DTC_Equipmentquality@discounttire.com</a>	
 <b>CRITICAL TO SAFETY</b>	<p>When servicing four new tires, lift one side of the vehicle at a time (two people recommended) to ensure even weight distribution.</p> <p>Never enter the zone beneath a lifted vehicle.</p>	
<b>6</b>	Once the service has been completed, lower the vehicle, remove the adapters, and return them to their proper storage location.	