
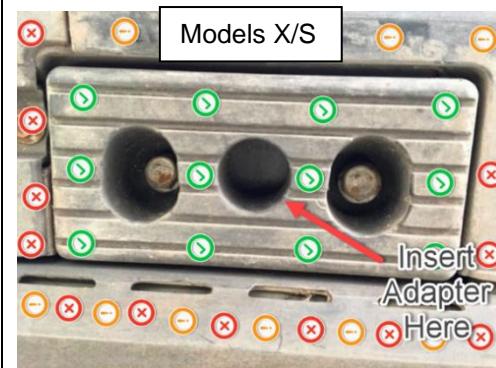


Raising Tesla Vehicles QRG

Purpose To be able to properly and safely lift Tesla vehicles.

Using the Tesla Jack Adapter Follow these steps when lifting Tesla vehicles:

Step	Action
1	Reference the CSL to verify the vehicle will need a jack adapter.
2	Collect the Tesla jack adapter and stage them at the tool stand prior to pulling the vehicle.
3	Only use flat bays and jacks to service the vehicle.
4	If the vehicle is equipped with air ride, ensure that it has been disabled.
5	Locate the first proper lift points on the undercarriage of the vehicle. Note: The different Tesla models have different lift point configurations (see screenshots on the right).

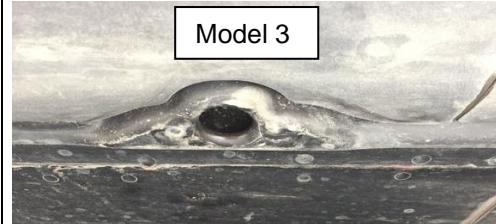

Using the Tesla Jack Adapter

Step	Action
7	<p>Place the adapter in the appropriate lift point.</p> <p>Note: If there is debris in the lift point, please remove/clean before inserting adapter; this increases the longevity of the O-ring.</p>
8	<p>Center jack with the adapter and begin to raise vehicle.</p>
9	<p>Repeat Steps 6 through 8 for the remaining lift points.</p>
10	<p>Once the service has been completed, lower the vehicle and remove the adapters and jacks.</p>
11	<p>Important: Place the adapters back into the storage bag; then return them to their proper location in the store.</p>